



February 17, 2004

To: Commissioner of Patents and Trademarks

From: Stephen B. Ackerman, Reg. No. 37,761
28 Davis Avenue
Poughkeepsie, NY 12603

Re: Serial No. **10/615,123**
Filing Date: **7/8/03**
Inventor(s): **Krenzke**
Title: **Slew Rate Sensing And Control Of A High-Voltage
Output Driver For A Variable Voltage Range And
Variable Output Load**

Please enter the enclosed Certified Application (European Patent Application No. 03392009.1 filed on 6/27/03) in the file for the above-referenced US patent application, which claims priority to the European patent application.

Respectfully submitted,

Stephen B. Ackerman, Reg. No. 37,761

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner of Patents P.O. Box 1450, Alexandria, VA 22313-1450 on February 17, 2004

Stephen B. Ackerman, Reg. No. 37,761

Signature 

Date February 17, 2004





**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03392009.1

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03392009.1
Demande no:

Anmeldetag:
Date of filing: 27.06.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Dialog Semiconductor GmbH
Neue Strasse 95
73230 Kirchheim/Teck-Nabern
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Slew rate sensing and control of a high-voltage output driver for a variable
voltage range and variable output load

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)


Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H03K/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

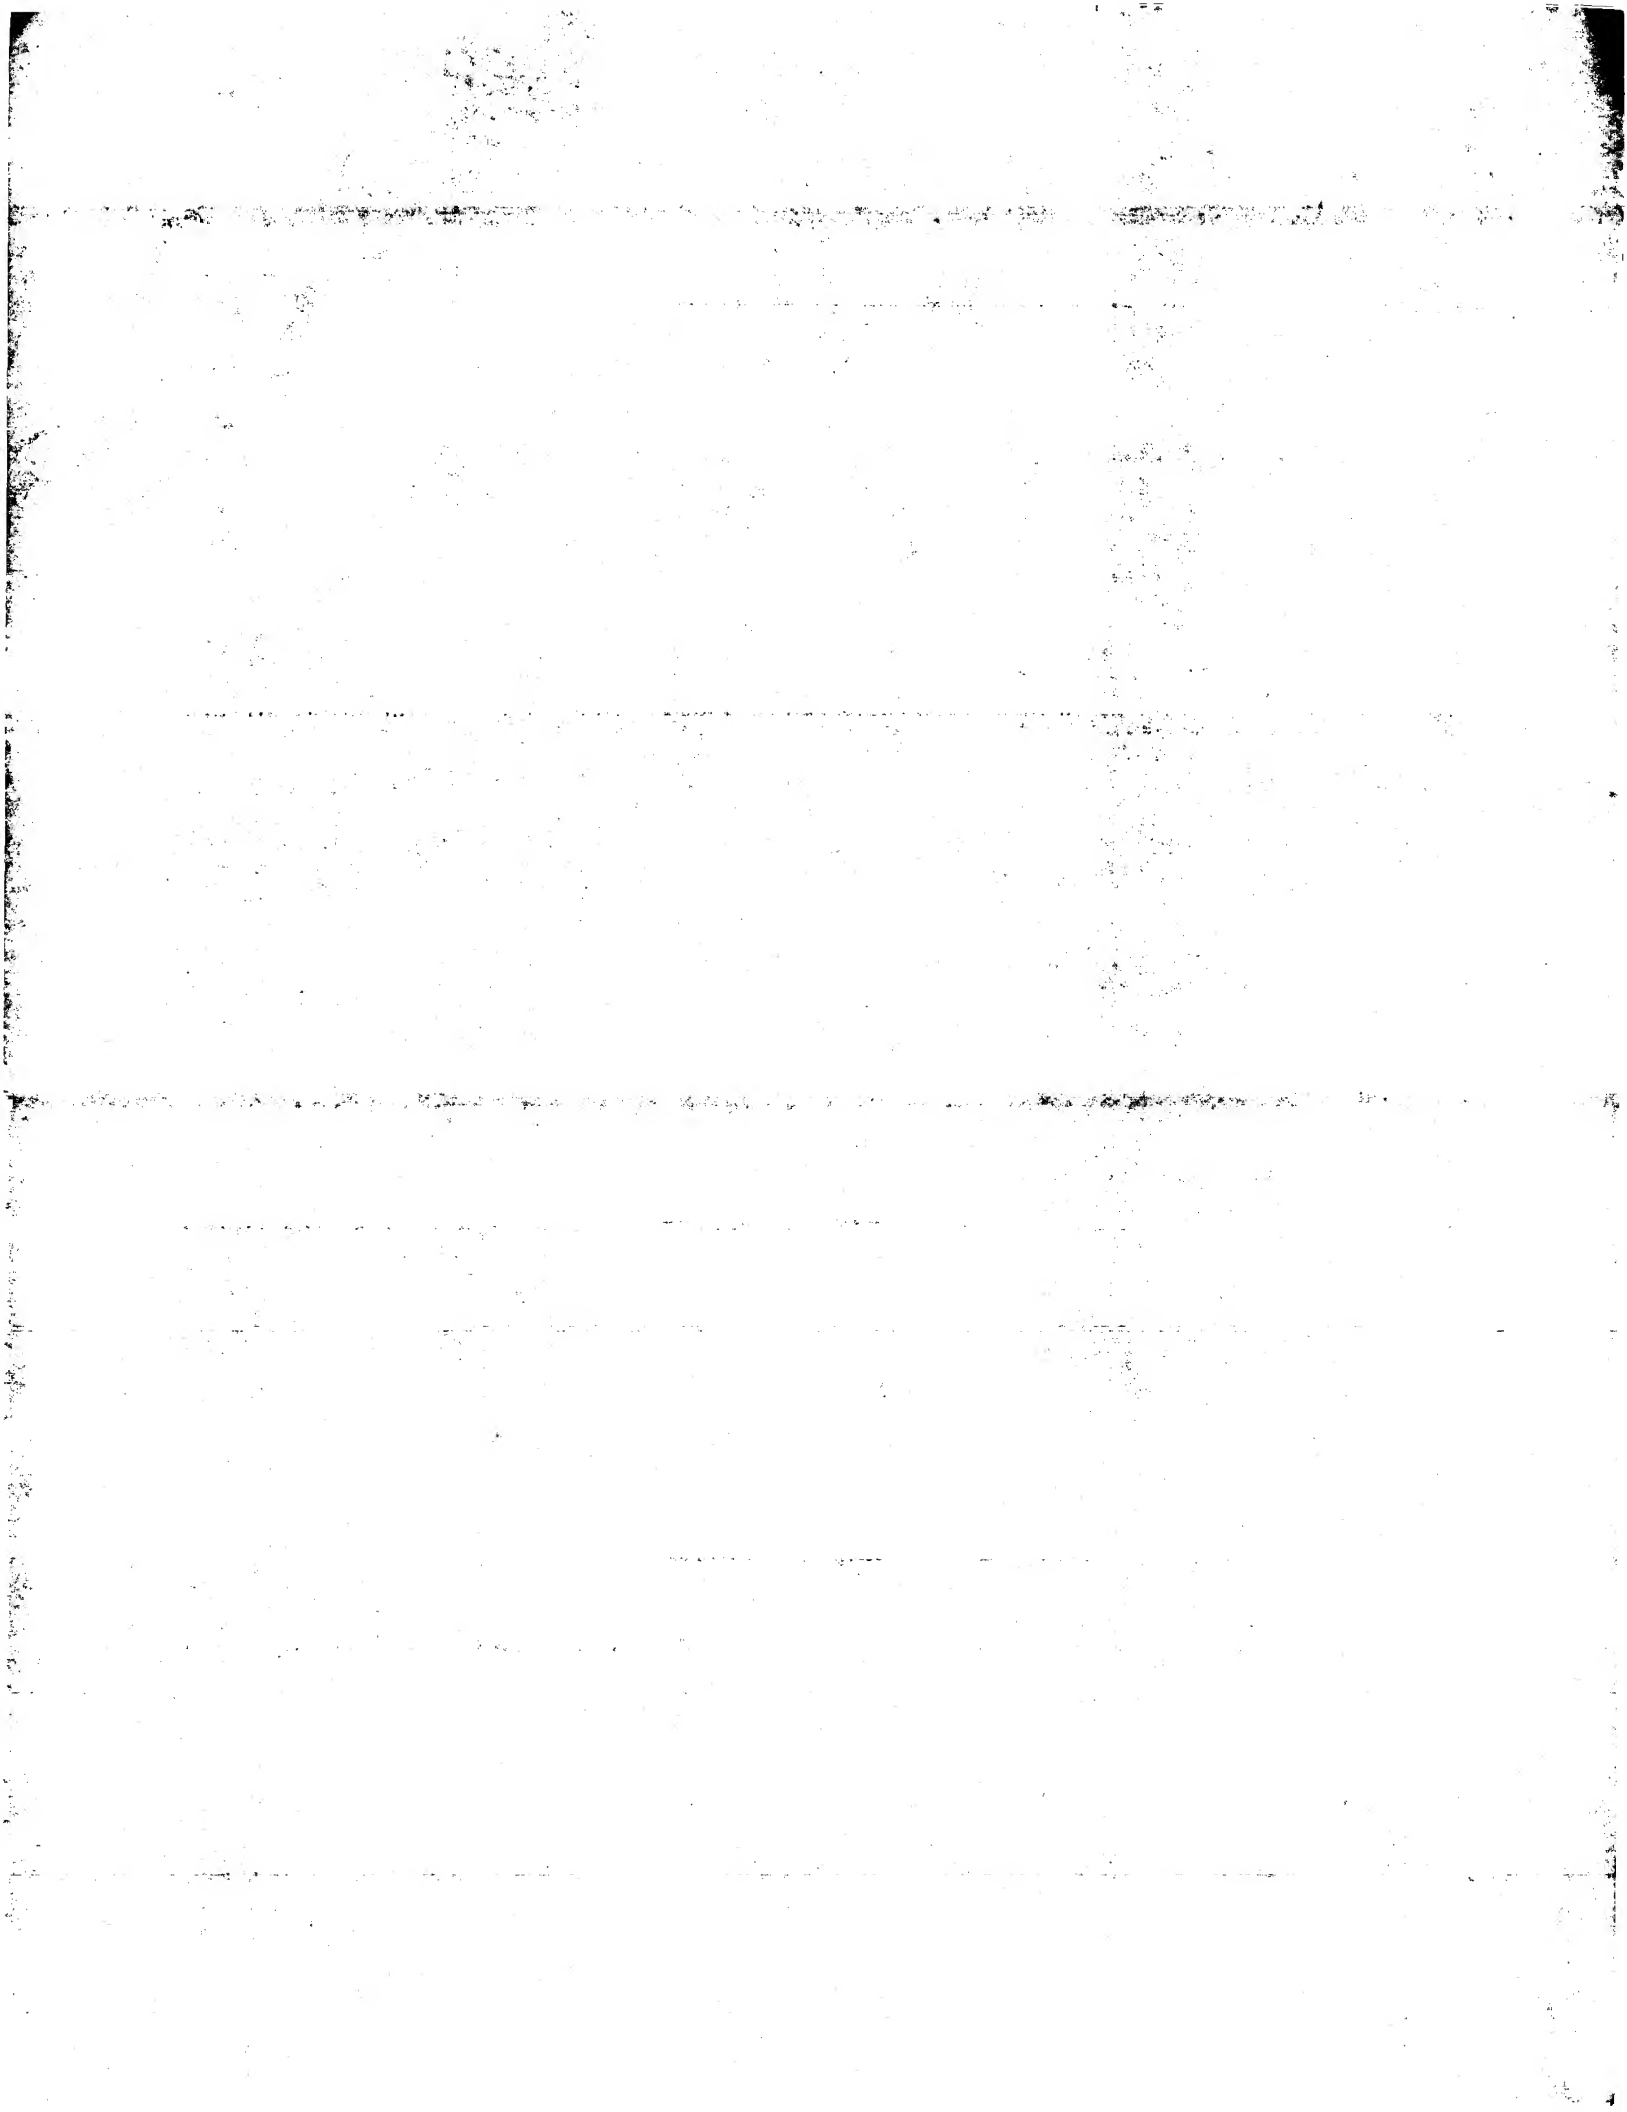

SLEW RATE SENSING AND CONTROL OF A HIGH-VOLTAGE OUTPUT DRIVER FOR A VARIABLE VOLTAGE RANGE AND VARIABLE OUTPUT LOAD

5

Technical field

10 The invention relates generally to higher voltage output drivers of electronic circuits and in particular to slew-rate controlled driver circuits within regulator loops realized with integrated-circuit technologies.

Background art

15

 Special output driver circuits in electronic applications are required, when it comes to driving heavier loads, e.g. electromechanical devices such as relays, small motors (AC, DC, or stepping), or other types of sensors and actuators.

20 Another application area is the driving of signals in data bus systems, especially when higher signal voltages on those bus systems are required e.g. when noisier electrical environments have to be taken into account. In this context a reduction of Electromagnetic Interference (EMI) phenomena is important too. These are noted quite common requirements for electronic parts as used in the automotive

25 industry, for example.

 Realizations of the prior art for such output driver circuits are often implemented as specifically tailored semiconductor circuits, fulfilling the operational demands regarding the higher voltages and augmented currents

30 needed. Furthermore these drivers have to be interconnected with some logic circuitry, which is controlling the overall operation of the driver circuits, mostly in conjunction with closed loop feedback regulator systems. These logic circuits or

even microprocessor systems normally are working with low voltages. The composition of these two voltage domains – one for higher, the other for lower voltages – has to be made in such a way, that no detrimental influences are affecting onto each other. Thereto an appropriately combined semiconductor
5 technology capable of handling all these demands is chosen, which most often leads to costly solutions.

Another problem to solve concerning these driver circuits is the sensing and control of the slew rate of the generated signals within the regulator loop. The
10 governing reference is the value of the slew rate, which is generated as an internal reference ramp. This reference ramp is usually generated between the rails of the external output range. In consequence the regulator is fed with the reference ramp for the value required and the driver output signal as the instantaneous signal value. This conception however requires the whole circuit to
15 operate within the high-voltage domain and needs therefore high-voltage drivers and regulator circuits.

It is a challenge for the designer of such circuits to achieve a high-quality, low-cost solution. Several prior art inventions referring to such solutions describe
20 related technologies, methods and circuits.

U. S. Patent (6,181,193 to Coughlin, Jr.) describes using thick-oxide CMOS devices to interface high voltage integrated circuits, especially a high voltage tolerant CMOS input/output interface circuit. In this circuit, a process feature
25 called "dual-gate" or "thick-oxide" process is used on any devices that will be exposed to high voltage. The thick-oxide devices have a larger capacitance and lower bandwidth, and therefore, preferably, they are only used where exposure to high voltage can cause damage. The remaining devices on the interface circuit may all use a standard process with the thinner oxide, allowing the I/O and the
30 core IC to run at maximum speed. The circuit design topology also limits the number of devices that are exposed to high voltage. Preferably, the protection scheme is broken down into two parts: the driver and receiver.

U. S. Patent (6,201,417 to Blum et al.) discloses the shaping of a current sense signal by using a controlled slew rate, a method and circuit for reducing the leading edge spike in a current sense signal. The current sense signal is a measure of the current through a switched power device controlled by a switching regulator controller. The slew rate of the current sense signal is limited to prevent the slew rate from exceeding a predetermined maximum. The limited slew rate signal is provided to the switching regulator controller. A transconductance amplifier may be used to limit the slew rate of the current sense signal. A capacitor at the output of the transconductance amplifier contributes to controlling the maximum slew rate of the amplifier. The capacitor is charged by the current output of the amplifier to provide a voltage signal for use in place of the original current sense signal. A switch may be provided for selecting between the slew rate limited current sense signal and the original current sense signal. A time delay may be used to control the switch so that the slew rate limiting is replaced by the original current sense signal after a first predetermined time portion of each "on cycle" of the switched power device.

U. S. Patent (6,476,654 to Tanaka) shows a slew rate adjusting circuit. An interface circuit includes a slew rate control unit, a pre buffer unit, and a main buffer unit. The slew rate control unit is configured as a current source circuit of the pre buffer unit. The slew rate control unit provides a constant current value by using a loop circuit that consists of a slew rate control macro, a decoder, a comparator, N transistor, an external terminal resistance (R_{ref}), and a reference voltage (V_{ref}). A size of the N transistor is adjusted based on a code gradually changed in the loop circuit, and finally the current value is determined uniquely.

U. S. Patent 6,483,386 (to Cress, et al.) discloses a low voltage differential amplifier with high voltage protection. An apparatus comprising a native device coupled to an input of an amplifier. The native device is configured to provide a high voltage protection in response to an enable signal.

Summary of the invention

A principal object of the present invention is to provide an effective and very manufacturable method and circuit for a slew rate controlled driving of loads
5 for higher voltages and currents.

Another further object of the present invention is to attain a secure cooperation of circuits working in different voltage domains – a high and a low one.
10

Another main object of this invention is to reduce EMI phenomena as much as possible, e.g. by slope smoothing.

Also an object of this invention is to transfer the slope destination of the
15 slew rate controlled signal from the high-voltage domain to the low-voltage domain.

Another object of this invention is to avoid the need for destination of absolute signal values by using a differential method for the slope detection.
20

Another still further object of the present invention is to reach a stable behavior of the regulator circuit, i.e. to attain an unconditional stability of the regulator loop.

A still further object of the present invention is to reduce the power
25 consumption of the circuit by realizing inherent appropriate design features.

Another further object of the present invention is to reduce the cost of manufacturing by implementing the circuit as a monolithic integrated circuit in low
30 cost CMOS technology.

Another still further object of the present invention is to reduce cost by effectively minimizing the number of expensive components.

In accordance with the objects of this invention, a method for realizing a stable high-voltage front-end for an output driver circuit, insensitive against supply voltage variations is given. Said method includes providing a slope transformer circuit, a differentiator with clock, a regulator consisting of a comparator with clock and a digital regulator part, and further a digital-to-analog converter. The method also comprises providing an output driver circuit driving an external load. Also included in said method is transforming a high-voltage input signal in relation to a static high supply voltage level into a proportional current signal, then mirroring this current signal and transforming back linearly into a voltage signal within a low voltage domain as proportional output signal. Equally included in said method is performing a differentiation transaction upon said low voltage output signal, in relation to given time steps from a clock generator. Also incorporated within said method is converting a low voltage differentiated output signal into a digital bit-signal by using a comparator, feeding said bit-signal into a digital regulator part. The comparator together with said digital regulator part builds a regulator. Said comparator is clocked and compares a reference input signal with said differentiated output signal. The comparator can be either a single-output comparator which then generates a bit stream output and uses a single reference value for comparison or a window comparator which then generates bit-outputs corresponding to the reference windows. Said bit outputs of said comparator are fed as input into the digital regulator part which generates an output signal. Finally comprises said method feeding said output signal from said digital regulator as input to a digital-to-analog converter and further the output of the analog-to-digital-converter as input to the output driver circuit, closing a regulator loop with said output signal from an output driver by feeding it back into said high voltage input signal; and in parallel driving an external load with a high voltage output from said output driver.

Also in accordance with the objects of this invention, a circuit, capable of driving higher loads for higher voltages and higher currents with slew rate controlled output signals is achieved. Said circuit comprises means for transforming a high voltage input signal in relation to a static high supply voltage

level into a proportional current signal. Also comprised in said circuit are means for mirroring said resulting current input signal into a current output signal and means for generating a low voltage output signal representing said current output signal. Further realizes said circuit means for performing differentiation transactions upon said low voltage output signal, in relation to given time steps and means for converting said low voltage differentiated output signal into a digital bit signal by using a comparator. Said circuit then includes means for feeding said bit signal into a digital regulator part as input and generate an output signal. Still further comprised are means for feeding said output signal from said digital regulator as input to a digital-to-analog converter and generate an analog output. Said analog output feeds the input of the output driver circuit and means for closing a regulator loop with said output signal from said output driver by feeding it back into said high voltage input signal and finally means for driving an external load with said high voltage output from said output driver.

Description of the drawings

In the accompanying drawings forming a material part of this description, the details of the invention are shown:

FIG. 1 illustrates the building blocks for the preferred embodiment of the present invention i.e. the block diagram of the slew rate control loop of the driver. The block diagram shows six essential circuit blocks realizable with modern monolithic integrated-circuit technologies.

FIG. 2a shows the electrical circuit diagram of the gain stage within the essential building block named slope transformer circuit and an extra block for a current mirror, internal to said slope transformer circuit together with the essential differentiator block, both as shown in FIG. 1.

FIG. 2b shows the crucial part of the electrical circuit diagram of FIG. 2a for separating the high-voltage and low-voltage domains in more details.

FIG. 3 illustrates the method how to put into practice the slew rate control with the circuit of the invention.

Description of the preferred embodiments

5

The preferred embodiments disclose a novel circuit for a high-voltage output driver for a variable voltage range and variable output load and a method of controlling the slew rate of the feedback signal within the regulator loop.

10

The description of the preferred embodiments of the invention is subdivided in two steps; firstly an overall description of the whole circuit and a short explanation of every functional circuit block are given and secondly a more detailed description of the crucial circuit block, wherein the separation of the voltage domains takes place, is following.

15

Referring now to FIG. 1, the preferred embodiment of the circuit of the present invention is illustrated. The five essential functional components of the circuit according to the invention are shown in FIG. 1 in the form of a block diagram. This diagram incorporates a slope transformer circuit block **100** named "SlopeTransform", a differentiator block **120**, named "Diff", a regulator named "Reg" with the sub-blocks comparator named "COMP" **135** as front-end part of the regulator and the digital regulator part **130**, named "DigRegPart", in a whole designated as Regulator **133**, a digital-to-analog converter **145** named "DAC" and an output driver circuit **140**, named "OutputDriver"; altogether connected in a closed regulator loop. The output signal of that loop, now then furnished by the "OutputDriver" is feeding the external load block **150**, generalized as "Load". This "Load" may represent further electronical circuits and/or electromechanical devices. The output signal of said "OutputDriver" block and, at the same time, the input signal into said block "SlopeTransform" on line **113** is called V_{Load} , the output signal from said block "SlopeTransform" on line **112** is called V_{Slope} .

An external control signal is fed into this regulator loop at pin **110** of the block "COMP", thus serving as the reference value for "Reg". Said reference signal can be a single analogue level or multi-signals for defining level windows.

5 The voltages for powering said circuit blocks come from two possible potential ranges, namely a low voltage V_{DD} , usually maximal as 5 V (common supply voltage ranges for CMOS circuits), and a high voltage V_{HV} , – starting with ranges higher than 5 V and up to for example of 24 V as normal operating range and maximum of up to for example of 40V without destruction. The voltage
10 indication V_{SS} signifies ground potential.

 The differentiator block "DIFF" - item **120** – and the block "Regulator" – item **133** – as well as the digital-to-analog converter block "DAC" – item **145** - are supplied solely from low voltage V_{DD} sources. The blocks "OutputDriver" – item
15 **140** - and "Load" – item **150** - are supplied with high voltage levels V_{HV} only. The block "SlopeTransform" – item **100** – however is supplied by both voltages, V_{DD} and V_{HV} , thus the physical separation of these two voltage ranges has to be realized within that circuit block. The separating line for the two voltage domains is clearly shown as dashed line in FIG. 1.

20

 Referring to FIG. 2a, the slope transformer circuit block – item 100 from FIG. 1 – called "SlopeTransform", which also serves as the aforementioned voltage domain separator is now explained in more detail. The need for a slope transformer circuit as such, especially in conjunction with bus driver circuits stems
25 from the already explained wishes for an EMI reduction. Slope smoothing in fact reduces effectively parasitic high frequency components. On the other hand too slowly rising and/or falling slopes would restrict the dynamical behavior or the maximal communication speed. Therefore a specified slew rate (as Min/Max-tolerance e.g.) for the slope is defined and thus makes some extra hardware
30 slope controller circuitry necessary. The dashed box in FIG. 2a outlines the "SlopeTransform" block. It owns five connectors: a slope signal input pin - item **216** – connected to high voltage line **113** in FIG. 1; a slope signal output pin – item **215** - connected to low voltage line **112** in FIG. 1; a high voltage supply pin –

item 217; a low voltage supply pin – item 219; and at last a ground pin – item 218.
 Said high voltage supply pin is connected to resistor R_1 – item 211 – which itself
 leads to the source of a first MOS transistor in p-channel technology, PMOS –
 item 212. The gate of said PMOS transistor is driven with the slope input signal
 5 from pin 216. The drain of said PMOS transistor (implemented with an extended
 drain design) is in turn connected with the drain of a second MOS transistor in n-
 channel technology, NMOS – item 213. Thus transistor PMOS 212 is working in a
 source follower configuration. Said drain of said NMOS transistor is equally
 implemented with an extended drain design. This NMOS transistor is used for
 10 decoupling the high voltage domain from the low voltage domain as described
 later on. The gate of the NMOS transistor is statically biased to such a level that
 its source always stays within the low voltage domain V_{DD} . Usually the gate of the
 NMOS transistor could therefore be as easiest directly derived from the voltage
 level of V_{DD} . The source of said NMOS transistor is now feeding its current into
 15 the input terminal of a current mirror circuit block – item 220, as can be seen from
 FIG. 2a. The mirrored output current from said current mirror serves now as entry
 to resistor R_2 – item 214; which is connected with pin 219 to said low supply
 voltage V_{DD} - and via pin 215 to said differentiator circuit block "Diff" - item 120 –
 also shown in FIG. 1. An operation breakdown has to emphasize firstly, that
 20 resistor R_1 , fed by V_{HV} , serves as a high voltage to current translator, transforming
 the input signal V_{Load} . Continuing secondly, said current mirror transposes this
 current to another current, hereto proportional. Finishing thirdly, the resistor R_2 ,
 fed by V_{DD} and said proportional current, translates said current back into the low
 signal voltage V_{Slope} , thus serving as a current to low voltage translator.

25
 Recalling FIG. 1 again, an important second aspect of the invention shall
 now be explicitly described. Having now available in the low voltage domain said
 signal V_{Slope} it is self-evident, that the absolute values of said signal V_{Slope} are
 basically and essentially determined by these two consecutive translation steps,
 30 namely said voltage to current to voltage translation. Thus any changes in the
 governing parameters for these translation would influence directly the absolute
 value of signal V_{Slope} , resulting in a high sensitivity of the regulator characteristics
 to these changes. Especially detrimental would be the variations of the high

supply voltage V_{HV} , which are usually very significant in practice. An important part of the invention is therefore the use of said differentiator block **120**, named "Diff", wherein the slope signal is evaluated as a differential voltage signal ΔV_{Slope} , related to a certain, given time step Δt . The resulting transformation ratio $TR = \Delta V_{Load} / \Delta V_{Slope}$ can then be calculated as $TR = (R_2 / R_1) * A_{CM}$, whereby A_{CM} is the aspect ratio of the current mirror components. As key point of the invention shall be recognized, that this transformation ratio TR of the slope transformer evaluated by the differentiator does not depend on any absolute voltage values, which primarily allows for the high to low voltage domain transfer of the slew rate detector circuitry operating at high-voltage domain and its reduced complexity. The implementation of the difference function is realized as a switched capacitor circuit, the necessary clock generator also determining said time step Δt . The following comparison function is also preferably realized with a time step Δt relation, i.e. by a clocked comparator, resulting in a digital bit signal further processed by a regulator circuit block "DigRegPart" **130**. The regulator's digital part "DigRegPart" can then be implemented e.g. as a counter, only incrementing or decrementing for respectively rising or falling edge signals. This means only a single polarity function is necessary for each edge polarity and therefore an increased regulator loop stability is achieved. Depending on the implementation of the comparator i.e. single bitstream, multi-bit window etc. various digital part realization concepts may improve the regulator accuracy and stability i.e. coarse and fine range definition with a window comparator output or integrator function on a single-bitstream comparator output. Adaptive regulator concepts are also an especially good solution where the external load conditions of the driver are stable over longer periods and the load is also defined only in a specified range.

It should be pointed out, that these transactions could in principle be realized also with analogue signals and circuits; here we assumed however digital signals – for a digital comparator and regulator. Another regulator implementation could be realized also with pure analogue circuits. The principle of the complete regulation loop keeps unchanged as described within Fig. 1. The change would only be the realization of the regulator block "Reg" as an analogue circuit with an

analogue output and then avoiding the “DAC” component. The analogue regulator output feeds then directly the driver input.

Looking now at FIG. 2b, the voltage domain separation, realized with said two transistors, PMOS and NMOS is further explained. The high voltage isolation barrier is built with the special drains D_{ext} , manufactured as extended drain designs of said transistors. Extended drain design for CMOS transistors signifies in that context, that the common, for source and drain substantially symmetrical layout of CMOS devices, fabricated with a standard CMOS process, is modified in such a way, that now between gate and drain an extra space, covered with additional field oxide is introduced. This type of transistor therefore is now substantially unsymmetrical. For this reason the breakthrough voltage for VGD is raised to e.g. about 40 V, a CMOS process feature size down to 0.35 μm presumed. In turn the breakthrough voltage for VDS is also elevated to e.g. about 40 V. These are values currently achievable by semiconductor foundries; it may be noted, that these values are strongly depending on the CMOS feature size. It is evident, that the extra masks and fabrication steps for extended drain devices are influencing the cost of production.

The V_{Bias} level can be selected as V_{DD} , the supply level of the low voltage domain, as the NMOS high-voltage device is only used in order to decouple the high-voltage from the low-voltage domain. The stage, realized with said two transistors, PMOS and NMOS is now further explained.

FIG. 3 illustrates the method how to realize the stable and insensitive – especially against supply voltage variations - high-voltage front-end for the output driver with the circuit of the invention, as described and explained before.

As a first step 301 is described, that the static high supply voltage level is transformed into a static current. With step 302, the high-voltage input signal is transformed into a proportional current signal. Step 303 combines said static current and current signal into a resulting current input signal. In step 304 said resulting current input signal is mirrored into a proportional current output signal.

Step 305 generates a low voltage output signal representing said current output signal. Within step 306 the necessary differential transactions upon said low voltage output signal are performed, each with relation to the given time steps. Step 307 compares the low voltage differentiated signal with a reference input and
5 generates a bit type signal output. In step 308 said bit signal is fed into the digital regulator part as input and further processed. Step 309 converts the digital regulator part output into an analogue signal. In step 310 said output signal from the analog-to-digital converter is fed as input to the output driver circuit. Step 311 closes the regulator loop with said output signal from the output driver by feeding
10 it back into the high voltage input signal. Finally step 312 drives the external load with the high voltage output from the output driver.

As shown in the preferred embodiments and evaluated by circuit analysis, the novel circuits and methods provide an effective and manufacturable
15 alternative to the prior art.

While the invention has been particularly shown and described with reference to the preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made without
20 departing from the spirit and scope of the invention.

Claims

1. A method for realizing a stable high-voltage front-end for an output driver circuit, insensitive against supply voltage variations, comprising:
- providing a slope transformer circuit, a differentiator with clock, a regulator with clocked comparator and digital regulator part, and an output driver circuit driving an external load;
 - transforming a static high supply voltage level into a static current;
 - transforming a high-voltage input signal into a proportional current signal;
 - combining said static current and proportional current signal into a resulting current input signal;
 - mirroring said resulting current input signal into a proportional current output signal;
 - generating a low voltage output signal representing said current output signal;
 - performing differential transactions upon said low voltage output signal, in relation to given time steps from a clock generator;
 - converting a low voltage differentiated output signal into a digital bit signal by a comparator using a given time step related reference;
 - feeding said bit signal into a digital regulator part for further processing generate an digital output signal;
 - convert said digital output signal into an analog signal as input to an output driver circuit;
 - closing a regulator loop with an output signal from an output driver by feeding it back into a high voltage input signal; and
 - driving a load with a high voltage output from an output driver.
2. The method according to claim 1 wherein said step of transforming a static high supply voltage level into a static current is implemented using a resistor.
3. The method according to claim 1 wherein said step of transforming a static high voltage supply level into a static current is implemented using an equivalent resistor circuit built of semiconductor circuits.

4. The method according to claim 1 wherein said step of transforming a high-voltage input signal into a proportional current signal is implemented using a PMOS transistor, configured as a source follower working together with an NMOS transistor, for decoupling the current mirror stage.

5

5. The method according to claim 1 wherein said step of transforming a high-voltage input signal into a proportional current signal is implemented using a PMOS transistor with extended drain, configured as a source follower working together with an NMOS transistor, for decoupling the current mirror stage.

10

6. The method according to claim 1 wherein said step of transforming a high-voltage input signal into a proportional current signal is implemented using a PMOS transistor, configured as a source follower working together with an NMOS transistor with extended drain, for decoupling the current mirror stage.

15

7. The method according to claim 1 wherein said step of transforming a high-voltage input signal into a proportional current signal is implemented using a PMOS transistor with extended drain, configured as a source follower working together with an NMOS transistor with extended drain, for decoupling the current mirror stage.

20

8. The method according to claim 1 wherein said step of mirroring said resulting current input signal into a proportional current output signal is realized using a current mirror circuit.

25

9. The method according to claim 1 wherein said step of generating a low voltage output signal representing said current output signal is realized using a resistor.

30

10. The method according to claim 1 wherein said step of generating a low voltage output signal representing said current output signal is implemented using an equivalent resistor circuit built of semiconductor circuits.

11. A circuit, capable of driving higher loads for higher voltages and higher currents with slew rate controlled output signals, comprising:

- means for transforming a static high voltage supply level into a static current;
- 5 - means for transforming a dynamic high voltage input signal into a proportional current signal;
- means for combining said static current and said proportional current signal into a resulting current input signal;
- means for mirroring said resulting current input signal into a current output
- 10 signal;
- means for generating a low voltage output signal representing said current output signal;
- performing differential transactions upon said low voltage output signal, in relation to given time steps from a clock generator;
- 15 - converting a low voltage differentiated output signal into a digital bit signal by a comparator using a given time step related reference;
- feeding said bit signal into a digital regulator part for further processing and generate a digital output signal;
- convert said digital output signal into an analogue signal as input to an output
- 20 driver circuit;
- means for driving an external load with said high voltage output from said output driver.

12. The circuit according to claim 11 wherein said means for transforming a static

25 high voltage supply level into a static current is a resistor.

13. The circuit according to claim 11 wherein said means for transforming a static high voltage supply level into a static current is an equivalent resistor circuit built of semiconductor circuits.

30

14. The circuit according to claim 11 wherein said means for transforming a dynamic high voltage input signal into a proportional current signal is a resistor.

15. The circuit according to claim 11 wherein said means for transforming a dynamic high voltage input signal into a proportional current signal is an equivalent resistor circuit built of semiconductor circuits.

5 16. The circuit according to claim 11 manufactured with the help of discrete active and passive components.

17. The circuit according to claim 11 manufactured with the help of discrete components and integrated circuits.

10

18. The circuit according to claim 11 manufactured in integrated circuit technology.

15

19. The circuit according to claim 11 manufactured in monolithic integrated circuit technology.

20. The circuit according to claim 11, manufactured in monolithic integrated CMOS technology.

20 21. The circuit according to claim 11, manufactured in monolithic integrated CMOS circuit technology with additional discrete PMOS and NMOS transistors.

25

22. The circuit according to claim 11, manufactured in monolithic integrated CMOS circuit technology with additional discrete PMOS and NMOS transistors with extended drain technology.

30

23. The circuit according to claim 11, manufactured in monolithic integrated CMOS technology with additional PMOS and NMOS transistors, assembled in Chip-On-Chip technology.

24. The circuit according claim 11, manufactured in monolithic integrated CMOS technology with additional PMOS and NMOS transistors with extended drain technology, assembled in Chip-On-Chip technology.

25. The circuit according to claim 11, wherein said means for performing differential transactions upon said low voltage output signal, in relation to given time steps from a clock generator is realized in integrated low-voltage CMOS technology.

26. The circuit according to claim 11, wherein said means for converting a low voltage differentiated output signal into a digital bit signal by a comparator using a given time step related reference is realized in integrated low-voltage CMOS technology.

27. The circuit according claim 11, wherein said means for feeding said bit signal into a digital regulator part for further processing and generate a digital output signal is realized in integrated low-voltage CMOS technology.

28. The circuit according to claim 11 wherein said means for mirroring said resulting current input signal into a current output signal is set up using a current mirror.

29. The circuit according to claim 28 wherein said current mirror circuit is implemented in integrated circuit technology.

30. The circuit according to claim 28, wherein said current mirror circuit is realized in integrated CMOS technology.

31. The circuit according to claim 28, wherein said current mirror circuit is realized in low-voltage CMOS technology

ABSTRACT

5

A circuit and method are given, to realize a high voltage output driver within a closed regulator loop with slew rate control, insensitive against supply voltage variations. The high-voltage front-end, essentially a slope detector, is implemented as a combination of a voltage-current with a current-voltage
10 transformer circuit, where only very few parts are working in the high voltage domain. Using the intrinsic advantages of that solution the circuit of the invention is manufactured with standard CMOS technology and only two discrete or integrated extended drain MOS components at low cost.

15 Fig. 1

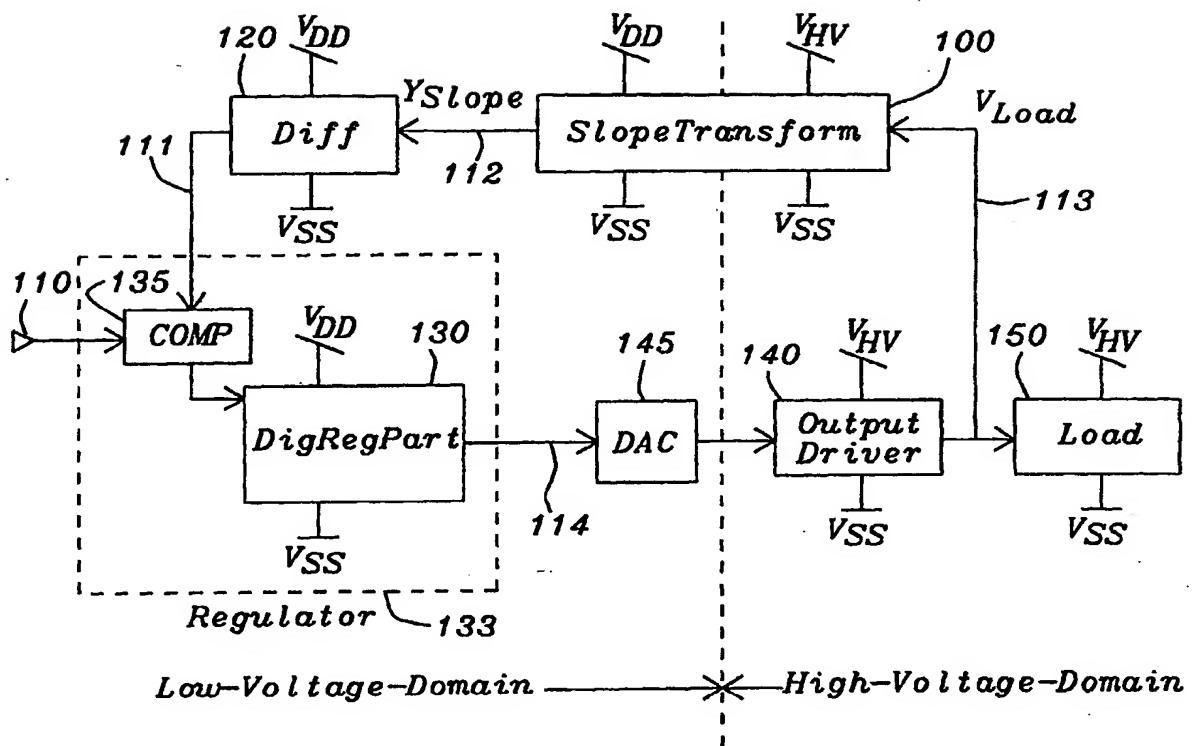


FIG. 1

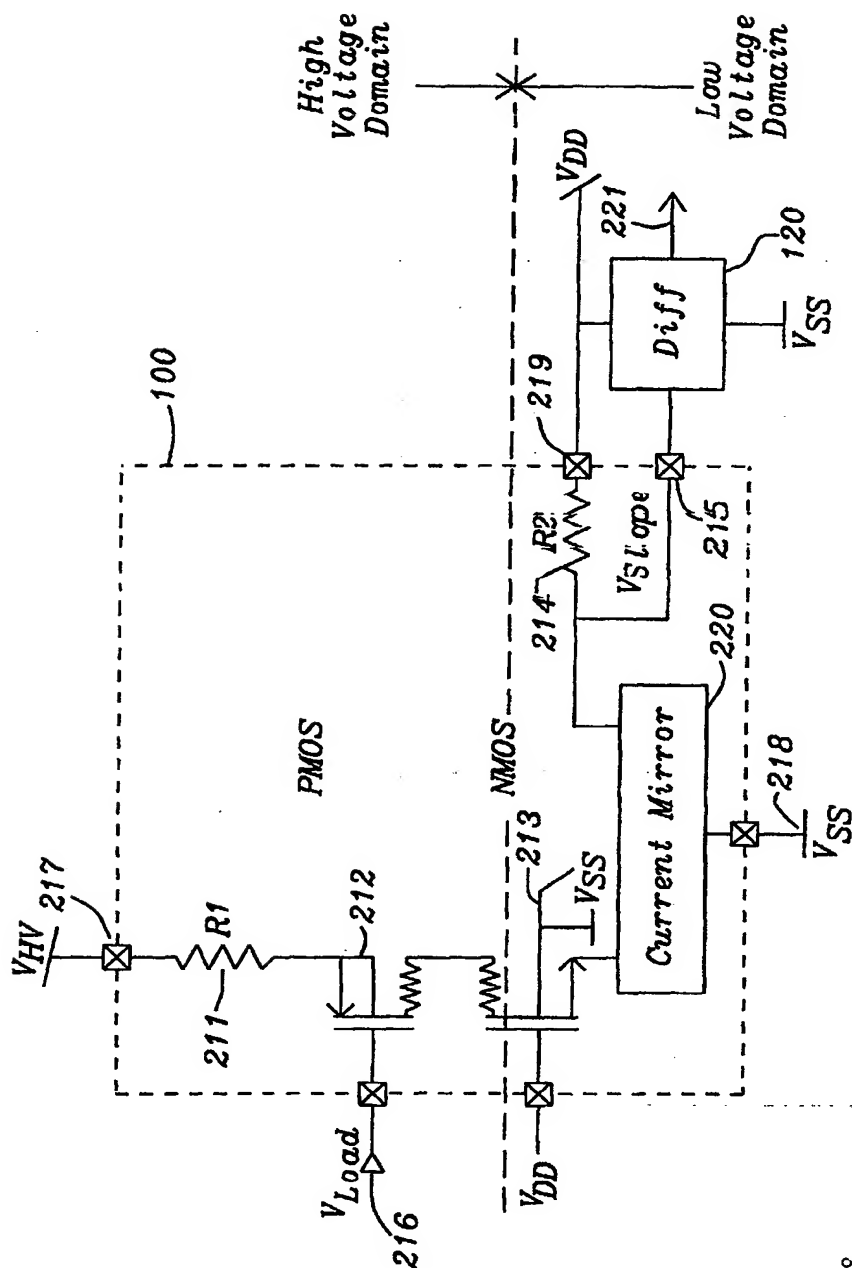


FIG. 2a

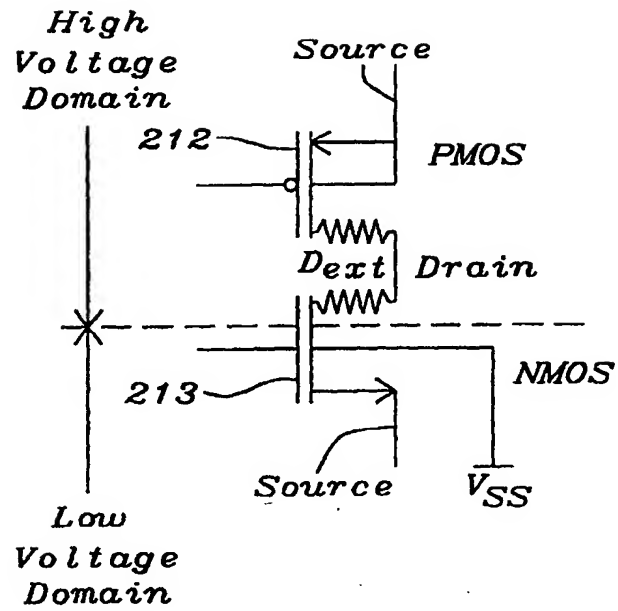


FIG. 2b

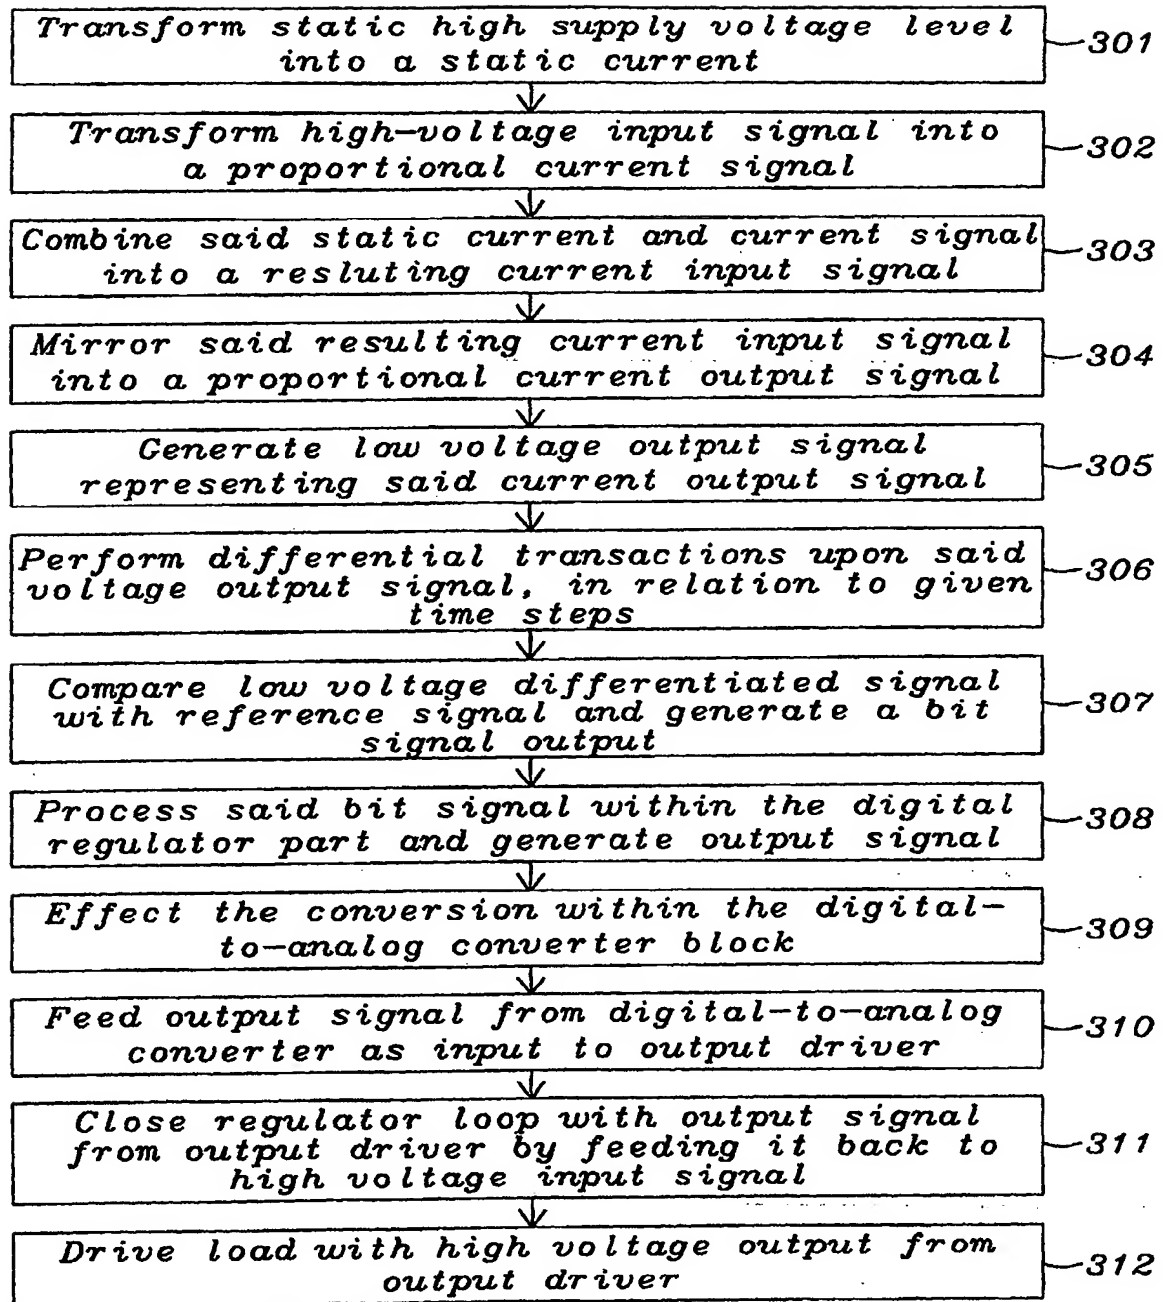


FIG. 3